JDF®-4S Lit Door

Height: 33.4" (84.8cm) Width: 15.7" (39.9cm) Depth: 28.0" (71.1cm)

- Patented High Intensity Mixing System delivers consistent quality beverages in the cup - cup after cup, from the top of the cup to the bottom of the cup
- 17.8cm cup clearance
- Both push and hold dispense and optional single size portion control dispense available in the same dispenser
- Quick dispense with 29.6 to 44.4mL per second flow rate
- One dispenser delivers both frozen and ambient concentrate products to maximize profitability by providing greater flexibility in product offerings
- Door lock standard
- Service friendly design makes set up and maintenance simple
- Burst Capacity: At rate of three 355mL drink/min, 145 drinks before exceeding 5°C (24°C ambient and 24°C incoming water temp)
- LED lighted door graphics bring high visibility to front-of-house applications

Agency:

Specifications

Product #: 37300.6004

Flavors: 4 Flavors

Water Access: Plumbed

Finish: Black

Door: Lit

Refrigerant: R-134A

Ice Bank: 18.00 lbs (8.165 kgs)

Dispense: Push Button

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
120	6	720	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-100	138-689	3/8" Male Flare Fitting	-

⚠ **WARNING:**

CAD Drawings

2D	Revit	KLC
●		

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

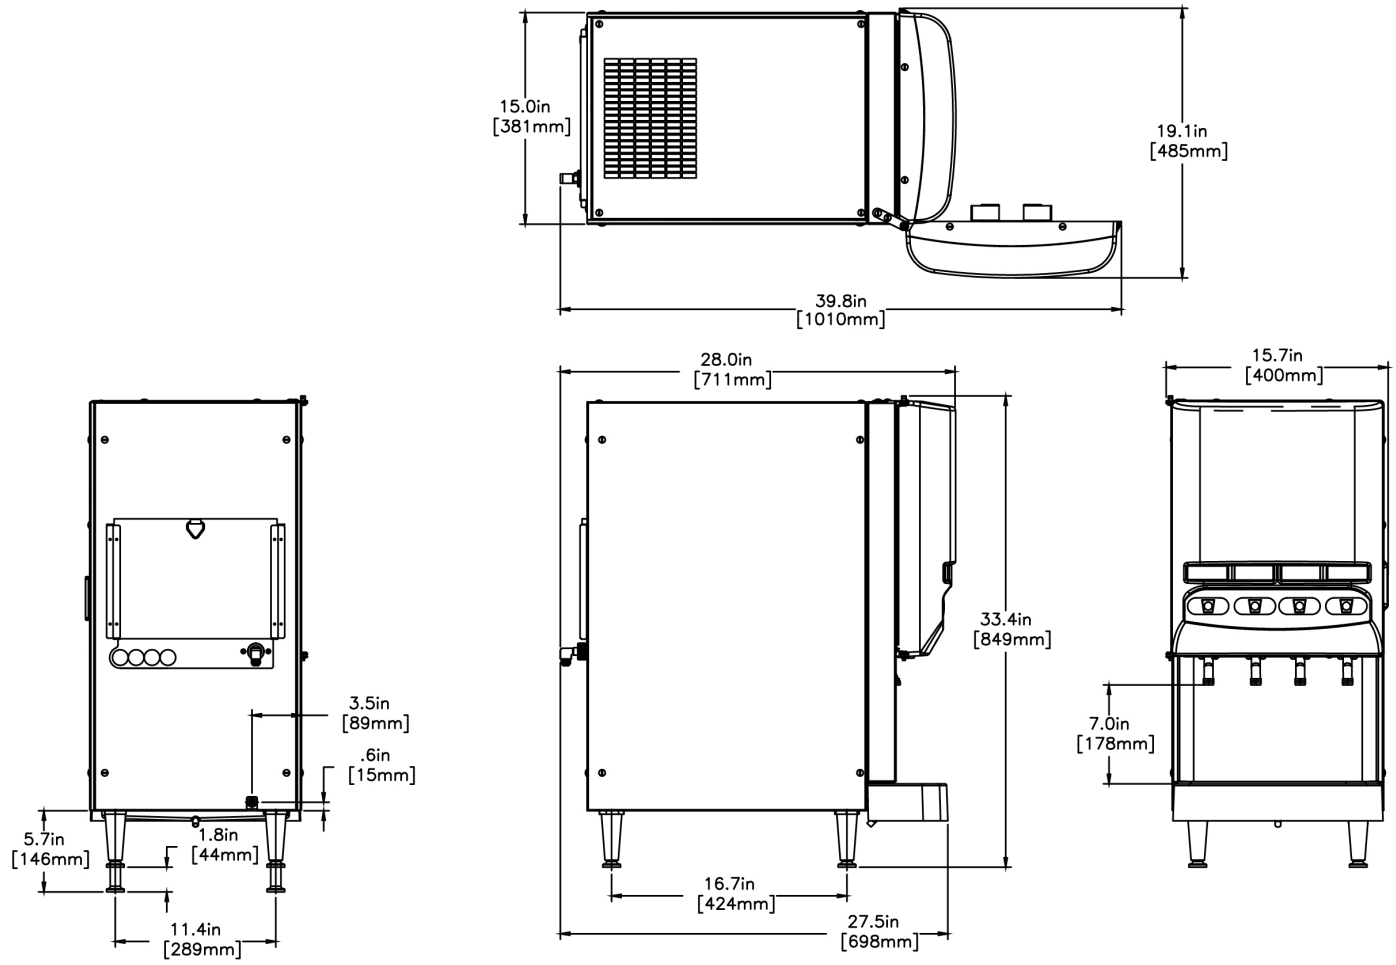

	Unit			Shipping				
	Height	**Width**	**Depth**	**Height**	**Width**	**Depth**	**Weight**	**Volume**
English	33.4 in.	15.7 in.	28.0 in.	43.7 in.	22.8 in.	30.5 in.	-	17.543 ft³
Metric	84.8 cm	39.9 cm	71.1 cm	111.0 cm	57.8 cm	77.5 cm	-	0.497 m³

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

Related Products & Accessories: JDF®-4S Lit Door(37300.6004)

KIT, AMBIENT CONC CVRSN JDF-4 Product #: 33699.0001[2]	 WATER FILTER, EQHP-10 Product #: 39000.0004[3]	 CONTAINER ASSY, REFILLABLE Product #: 39302.0000[2]	 WIRE GRILL, DRIP TRAY (JDF-4S) Product #: 39613.0000	KIT, HOSE ASSY-PUMP JDF-2S/4S Product #: 39690.0000[2]
 TRAY, EXTENDED DRIP JDF-4S Product #: 40789.1000	 KIT, TST 4 VALVE MECH SWITCH Product #: 45541.1004	 KIT, TST 4 VALVE OVAL OVERLAY Product #: 45541.1006	 SYSTEM, WQ-55(2)5 Product #: 56000.0004[1]	 SYSTEM, WEQ-10(1.5)5 Product #: 56000.0027[1]
 CARTRIDGE, WQ-55(2)5 Product #: 56000.0104[1]	 CARTRIDGE, WEQ-10 (1.5)5 Product #: 56000.0122[1]			

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

Serving & Holding Options: JDF®-4S Lit Door(37300.6004)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

WELBILT
an Ali Group Company