

JDF®-4S

Height: 33.4" Width: 15.7" Depth: 27.5"
(84.8cm) (39.9cm) (69.9cm)



- Patented High Intensity Mixing System delivers consistent quality beverages in the cup - cup after cup, from the top of the cup to the bottom of the cup
- 17.8cm cup clearance
- Both push and hold dispense and optional single size portion control dispense available in the same dispenser
- Quick dispense with 29.6 to 44.4mL per second flow rate
- With Cold Water dispense feature
- One dispenser delivers both frozen and ambient concentrate products to maximize profitability by providing greater flexibility in product offerings
- Door lock standard
- Service friendly design makes set up and maintenance simple
- Burst Capacity: At rate of three 355mL drink/min, 145 drinks before exceeding 5°C (24°C ambient and 24°C incoming water temp)
- Iced Coffee Graphic

Agency:



Specifications

Product #: 37300.6016
Flavors: 4 Flavors
Water Access: Plumbed
Finish: Black
Door: Un-Lit
Refrigerant: R-134A
Ice Bank: 18.00 lbs (8.165 kgs)
Dispense: Push Button

Additional Features

Cold Water Button

Electrical & Capacity

| Volts* | Amps | Watts | Cord Attached | Plug Type | 8oz cups/hr 236ml cups/hr | Input H ² O Temp. | Phase | # Wires plus Ground | Hertz |
|--------|------|-------|---------------|------------|------------------------------|------------------------------|-------|---------------------|-------|
| 120 | 6 | 720 | Yes | NEMA 5-15P | - | 60°F (15.5°C) | 1 | 2 | 60 |

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

| PSI | kPa | Fitting Supplied | Water Flow Required (GPM) |
|--------|---------|-------------------------|---------------------------|
| 20-100 | 138-689 | 3/8" Male Flare Fitting | - |


CAD Drawings

| 2D | Revit | KLC |
|----|-------|-----|
| ● | | |



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
05/03/2021

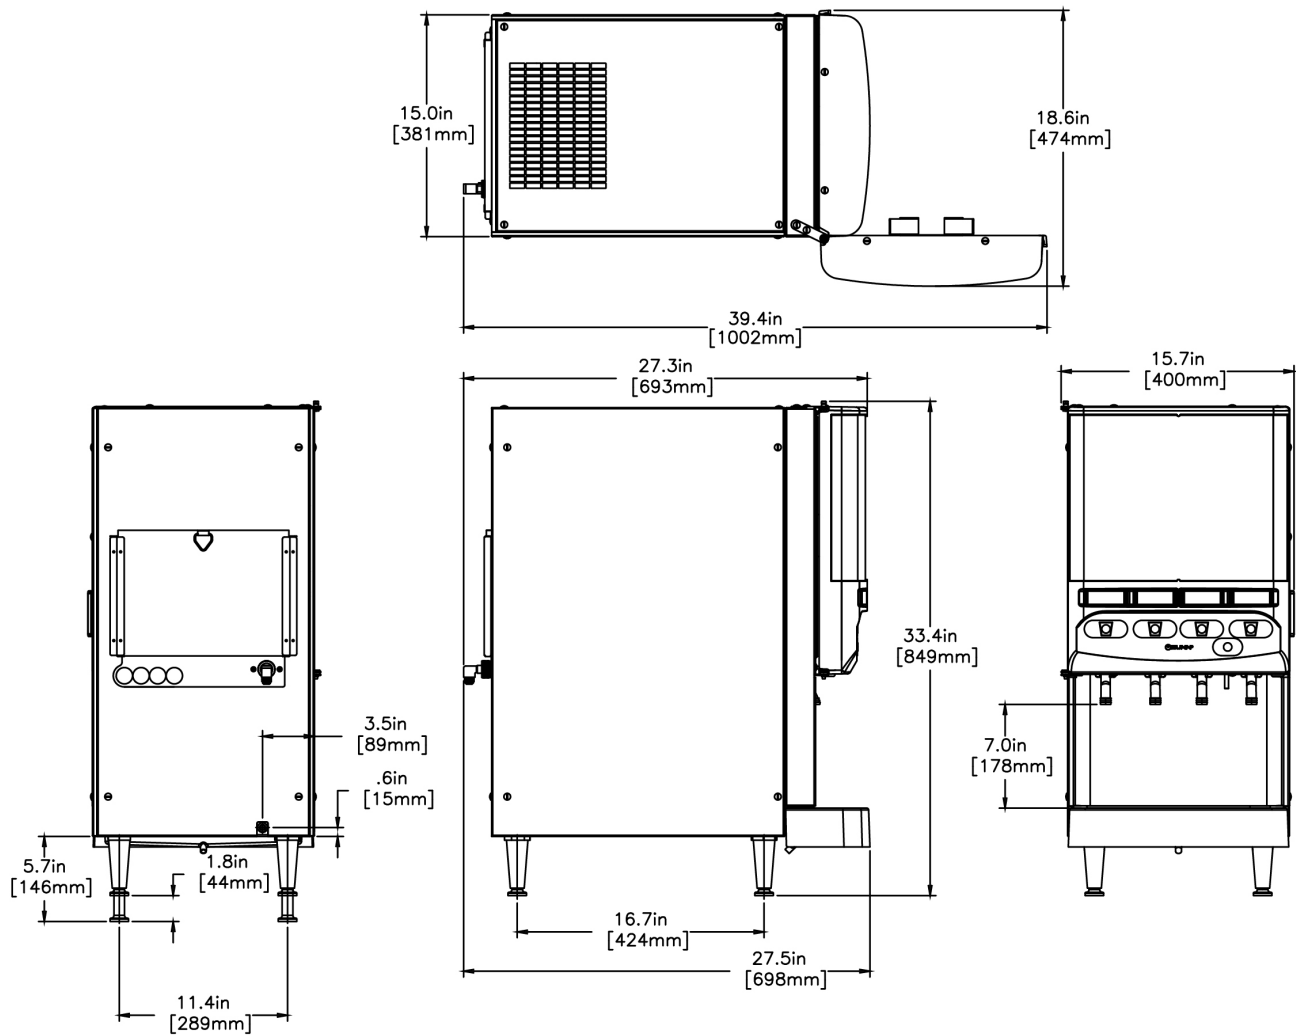

| Unit | | | Shipping | | | | | |
|---------|----------|----------|----------|----------|----------|----------|--------|------------------------|
| | Height | Width | Depth | Height | Width | Depth | Weight | Volume |
| English | 33.4 in. | 15.7 in. | 27.5 in. | 43.7 in. | 22.8 in. | 30.5 in. | - | 17.543 ft ³ |
| Metric | 84.8 cm | 39.9 cm | 69.9 cm | 111.0 cm | 57.8 cm | 77.5 cm | - | 0.497 m ³ |



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
05/03/2021

Related Products & Accessories: JDF®-4S(37300.6016)

KIT, AMBIENT CONC
CVRSN JDF-4

Product #: 33699.0001



CONTAINER ASSY,
REFILLABLE

Product #: 39302.0000



WIRE GRILL, DRIP TRAY
(JDF-4S)

Product #: 39613.0000

KIT, HOSE ASSY-PUMP
JDF-2S/4S

Product #: 39690.0000



TRAY, EXTENDED DRIP
JDF-4S

Product #: 40789.1000



Serving & Holding Options: JDF®-4S(37300.6016)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
05/03/2021