NITRON® Cold Draft Countertop 4:1 - 12:1

Height: 34.0" (86.4cm) Width: 9.8" (24.9cm) Depth: 29.8" (75.7cm)

- Patented BUNN gas infusion technology can produce up to 3 minutes of cascading micro-bubbles
- Patented High Intensity® mixing chamber assures a perfectly blended finished beverage, from cup to cup
- Uses familiar 1-gallon bag-in-box (BIB) concentrates and refillable containers that are easy to manage, with each BIB serving from 5 to 13 gallons of finished drinks
- Chrome-plated brass tap handles and nitro stout nozzles provide the quality-oriented craft experience of serving a premium beverage on tap
- Serve two different coffees or teas using 1-gallon concentrate BIBs or refillable containers
- Automatic water bath fill maintains water bath level for optimal cold beverage capacity
- LED back-lit door for high visual impact
- At a rate of one 16oz drink per minute, can dispense 60 drinks before exceeding 41°F (using 75°F incoming water)
- Refrigerated product cabinet protects flavor integrity and product life
- Large dispense area accommodates taller cups and carafes up to 8.76"
- Service-friendly design makes set-up and maintenance simple

⚠ TANK REGULATOR REQUIRED

Agency:

Specifications

Product #: 51600.6000

Flavors: 2 Flavors

Product Ratio: 4:1-12:1

Connector: Ball-valve

Water Access: Plumbed

Finish: Black

Door: Lit

Refrigerant: R-134A

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
120	6	720	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
30-90	207-621	3/8" Male Flare Fitting	0.94

⚠ **WARNING:**

CAD Drawings

2D	Revit	KLC
●		

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

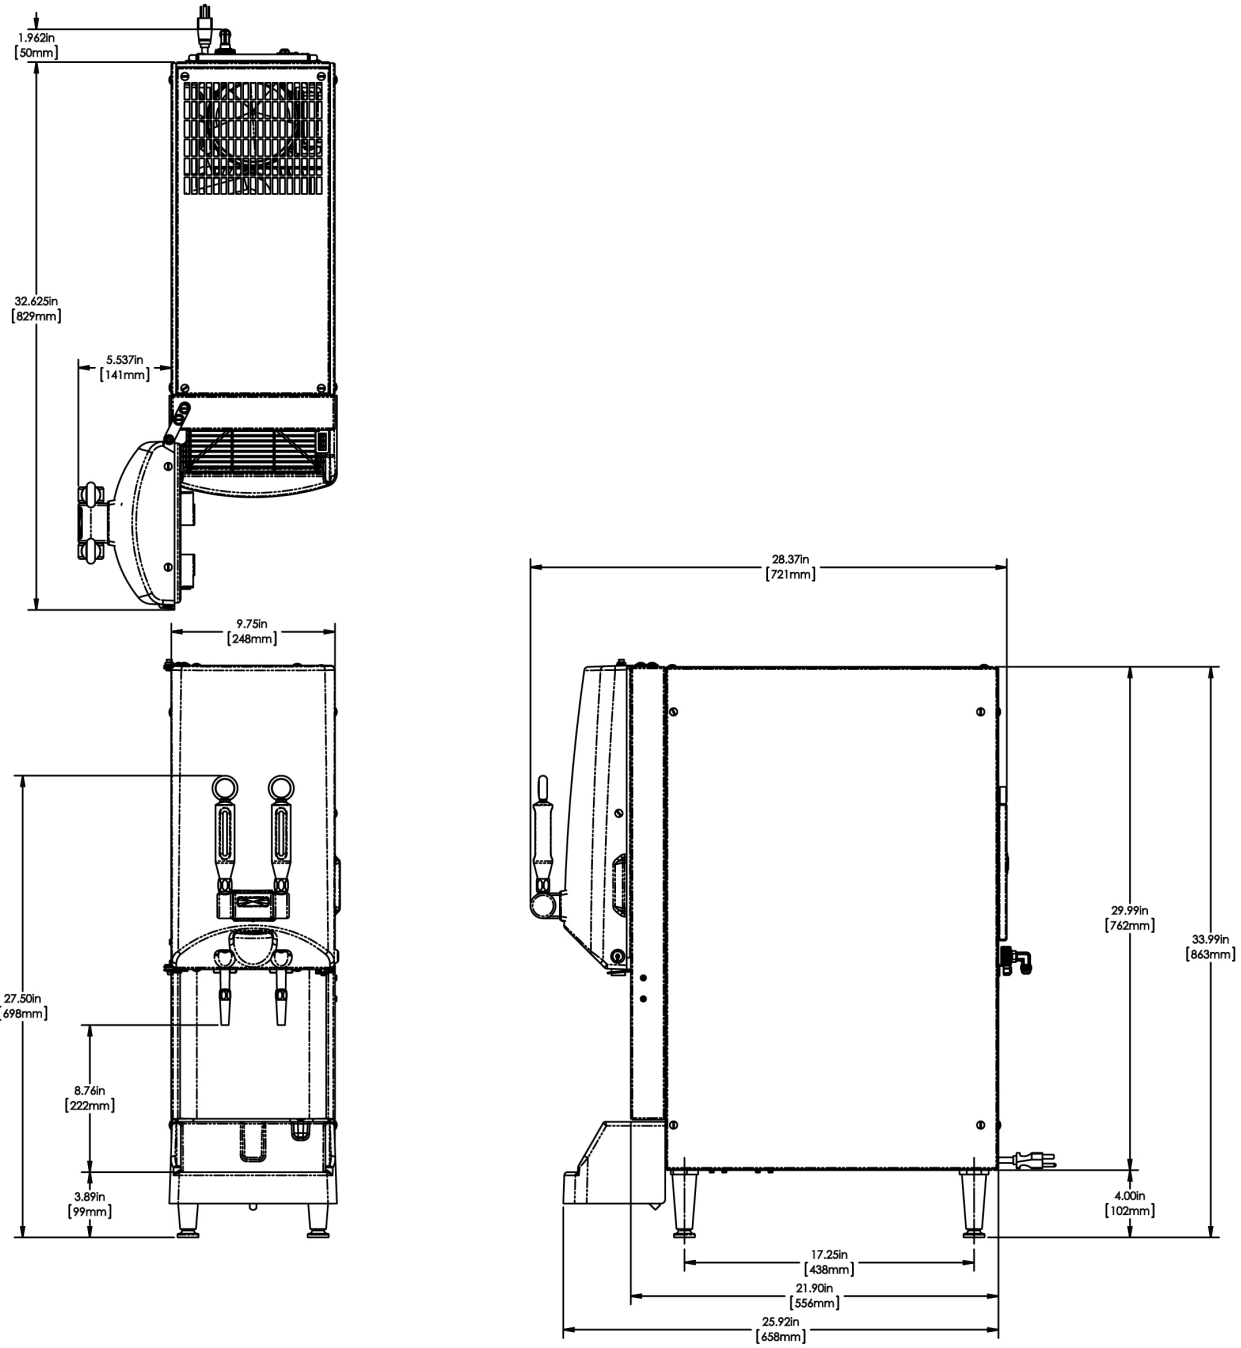

	Unit			Shipping				
	Height	**Width**	**Depth**	**Height**	**Width**	**Depth**	**Weight**	**Volume**
English	34.0 in.	9.8 in.	29.8 in.	43.7 in.	22.8 in.	30.5 in.	130.000 lbs	17.543 ft³
Metric	86.4 cm	24.9 cm	75.7 cm	111.0 cm	57.8 cm	77.5 cm	58.968 kgs	0.497 m³

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

Related Products & Accessories: NITRON® Cold Draft Countertop 4:1 - 12:1(51600.6000)

SANITIZER,KAY-5 (BOX-200 PKTS) Product #: 24634.0000	 SANITIZER,KAY-5 (BOX-50 PKTS) Product #: 24634.0001	 CONTAINER ASSY, REFILLABLE Product #: 39302.0000[2]	 KIT, SWITCH COVER - 2 VALVE CBDSPCT Product #: 45536.1002	 KIT, PRIMARY N2 REGULATOR Product #: 54060.0000[2]

 SYSTEM, WQ-55(2)5 Product #: 56000.0004[1]	 SYSTEM, WQ-60(3.5).2C Product #: 56000.0014[1]	 SYSTEM, WEQ-10(1.5)5 Product #: 56000.0027[1]	 SYSTEM, WEQ-18(2).2C Product #: 56000.0036[1]	 CARTRIDGE, WQ-55(2)5 Product #: 56000.0104[1]

 CARTRIDGE, WQ-60 (3.5).2C Product #: 56000.0114[1]	 CARTRIDGE, WEQ-10 (1.5)5 Product #: 56000.0122[1]	 CARTRIDGE, WEQ-18 (2).2C Product #: 56000.0128[1]

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

Serving & Holding Options: NITRON® Cold Draft Countertop 4:1 - 12:1(51600.6000)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

WELBILT
an Ali Group Company