NITRON® Cold Draft Single 1-Gal Scholle

Height: 34.0" Width: 10.0" Depth: 28.4" (86.4cm) (25.4cm) (72.1cm)



- Using a 1-gallon Scholle concentrate BIB, serve a single coffee or tea as both Nitro and Still
- Patented BUNN gas infusion technology can produce up to 3 minutes of cascading micro-bubbles
- Patented High Intensity® mixing chamber assures a perfectly blended finished beverage, from cup to cup
- Mounted on standard 3/8"-16 UNC threads, chrome plated brass tap handles are interchangeable with custom handles for a more personalized look
- Automatic water bath fill maintains water bath level for optimal cold beverage capacity
- Sleek, all-black door complements any commercial setting
- Flashing red LED light on door alerts the operator when to replenish nitrogen tank
- At a rate of one 16oz drink per minute, can dispense 60 drinks before exceeding 41°F (using 75°F incoming water)
- · Refrigerated product cabinet protects flavor integrity and product life
- Large dispense area accommodates taller cups and carafes up to 8.76"
- · Service-friendly design makes set-up and maintenance simple
- Gas module not included with this model. A tank regulator is required

Agency:





Specifications

Product #: 51600.0042 Water Access: Plumbed

Flavors: 1 Flavor Finish: Black
Product Ratio: 4:1-12:1 Door: Lit

Connector: Scholle Refrigerant: R-134A

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr Input H²O Phase 236ml cups/hr Temp.		Phase	# Wires plus Ground	Hertz
120	6	720	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
30-90	207-621	3/8" Male Flare Fitting	0.94


CAD Drawings


Additional Features

2D	Revit	KLC
•	•	

MARNING:



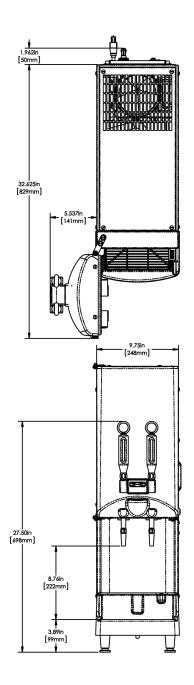

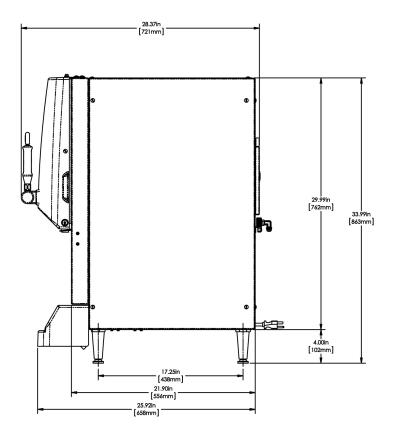

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	34.0 in.	10.0 in.	28.4 in.	43.7 in.	22.8 in.	30.5 in.	130.000 lbs	17.586 ft ³
Metric	86.4 cm	25.4 cm	72.1 cm	111.0 cm	57.9 cm	77.5 cm	58.968 kgs	0.498 m³



Related Products & Accessories: NITRON® Cold Draft Single 1-Gal Scholle(51600.0042)



SANITIZER,KAY-5 (BOX-200 PKTS)

Product #: 24634.0000



SANITIZER, KAY-5 (BOX-50 PKTS)

Product #: 24634.0001



KIT, TST 2 VALVE NITRON

Product #: 45536.1004



KIT, PRIMARY N2 **REGULATOR**

Product #: 54060.0000²

TUBE ASSY, CBDSPCT SCHOLLE SR Y-FITING

Product #: 55011.0005²



FITTING ASSEMBLY, SCHOLLE QUICK CONNECT

Product #: 55324.0000²



TUBE ASSEMBLY, EXTENSION QUICK CONNECT

Product #: 55325.00002



NITRON GAS MODULE, 120V 60HZ

Product #: 55660.00051



KIT, FILTERS NGM

Product #: 56333.0000



KIT, SWITCH COVER - 2 VALVE CBDSPCT

Product #: 58139.0000

1NSF Certified and Post Certified with spec sheet model listed 3NSF Certified under Solventum Purification 4NSF Certified under Mayea LLC 5NSF Certified under Zojirushi 5NSF Certified under Qins Inc 7NSF COMPONENT Certified



Serving & Holding Options: NITRON® Cold Draft Single 1-Gal Scholle(51600.0042)
Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

