

DUAL SH DBC® SST w/ Lower Faucet

Height: 36.0" Width: 18.0" Depth: 24.8"
(91.4cm) (45.7cm) (63.0cm)



- Brews 1/2, 1 or 1 1/2 gallon (1.9, 3.8 or 5.7L) batches
- Brews up to 19.3gallons (73.1L) of perfect coffee per hour
- No hot surfaces in coffee holding area
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present
- Patented server heat control automatically shuts off once target temperature is reached (Can be set to 175°-190°F (79.4°-87.8°C))
- Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- SplashGard® funnels deflect hot liquids away from the hand
- Energy saver mode reduces tank temperature during idle periods
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGard®
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, pulse brew, and pre-infusion timing
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools
- Servers not included unless otherwise noted

Server(s) sold separately

Agency:



Specifications

Product #: 33500.0042

Funnel: Smart Funnel

Water Access: Plumbed

Faucet: Lower

Interface: Wireless

Finish: Stainless

Additional Features

BrewWISE

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120/208-240	23.9-29.1	4980-6800	No	-	302	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-

CAD Drawings


2D	Revit	KLC
●		

WARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025

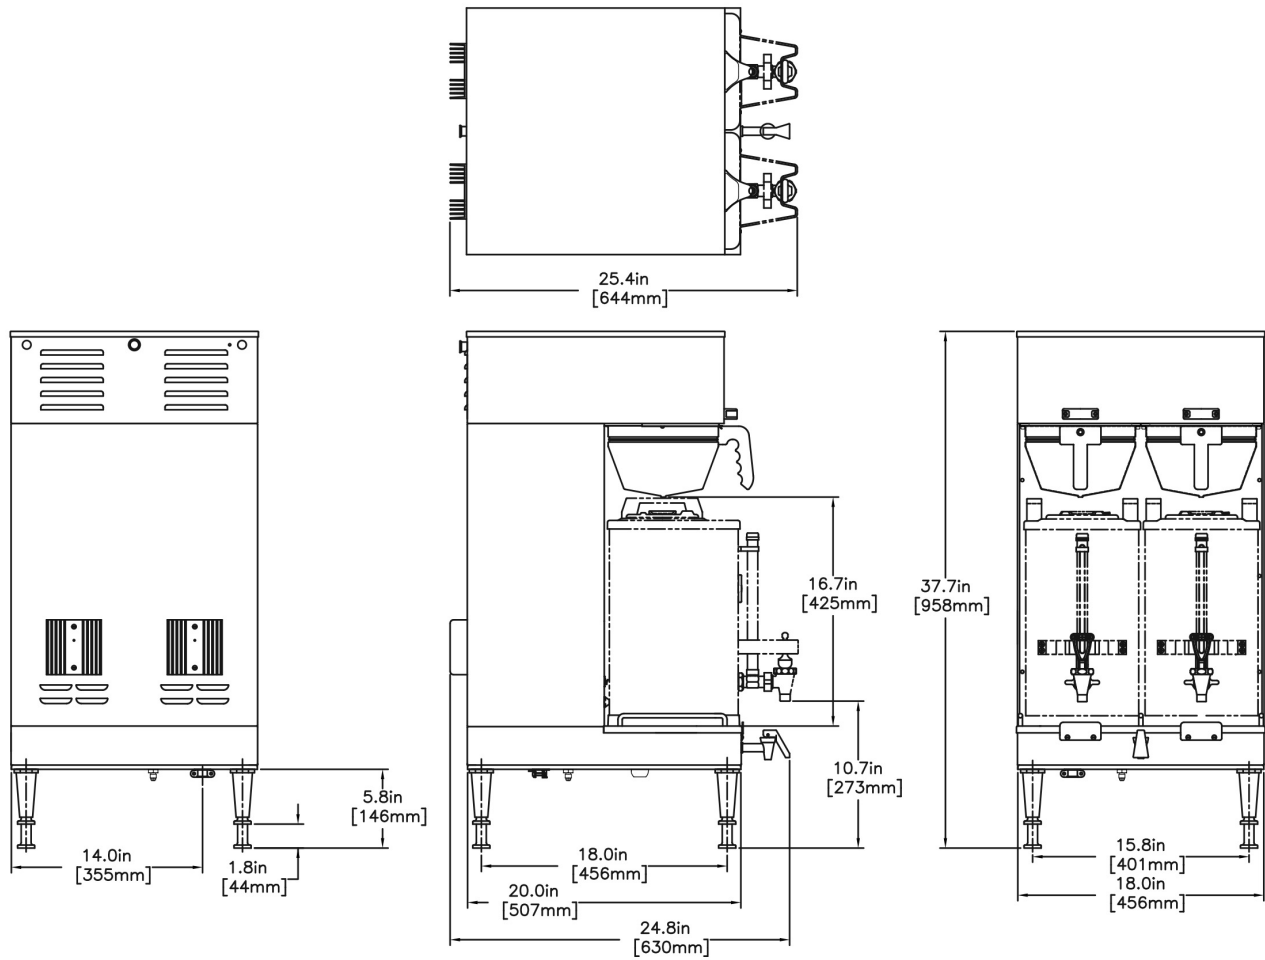

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	36.0 in.	18.0 in.	24.8 in.	39.8 in.	21.6 in.	27.1 in.	90.000 lbs	13.493 ft³
Metric	91.4 cm	45.7 cm	63.0 cm	101.0 cm	54.9 cm	68.9 cm	40.824 kgs	0.382 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.


Last Updated:
07/08/2025

Related Products & Accessories: DUAL SH DBC® SST w/ Lower Faucet(33500.0042)



FILTERS, GOURMET 500
500/1 50/CL

Product #: 20138.1000



DRIP TRAY KIT, DUAL &
SH

Product #: 27150.0000



1SH STAND, 120V

Product #: 27825.0000⁷



1SH STAND, 120V BLK

Product #: 27825.0003⁷



2SH STAND, 120V

Product #: 27875.0000⁷



2SH STAND, 120V BLK

Product #: 27875.0003⁷



FUNNEL ASSY, W/
INSERTS SMTF

Product #: 32643.0000²

CARD ASSY, RECIPE
TRANSFER (BRW)

Product #: 34447.0016



SYSTEM, WQ-55(3).2L

Product #: 56000.0002¹



SYSTEM, WQ-55(3).2

Product #: 56000.0005¹



SYSTEM, WEQ-25(2).2

Product #: 56000.0028¹



SYSTEM, WEQ-35(3).2L

Product #: 56000.0034



CARTRIDGE, WQ-55
(3).2L

Product #: 56000.0102¹



CARTRIDGE, WQ-55(3).2

Product #: 56000.0105¹



CARTRIDGE, WEQ-25
(2).2

Product #: 56000.0124¹

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Mavea LLC ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025

Related Products & Accessories: DUAL SH DBC® SST w/ Lower Faucet(33500.0042)



CARTRIDGE, WEQ-35
(3).2L

Product #: 56000.01261



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025

Serving & Holding Options: DUAL SH DBC® SST w/ Lower Faucet(33500.0042)



SH SERVER, 1.5G/5.7L
NO FL ADJ TMR

Product #: 27850.0001¹



SH SERVER, 1.5G/5.7L
BLK NO FL ADJ TMR

Product #: 27850.0004¹



SH SERVER, 1.5G/5.7L
45 MIN ADJ TMR

Product #: 27850.0006¹



SH SERVER, 1.5G BLK
60 MIN ADJ TMR

Product #: 27850.0008¹



SH SERVER, 1.5G 120
MIN ADJ TMR AUTO OFF

Product #: 27850.0009¹



SH SERVER, 1.5G/5.7L
240 MIN ADJ TMR

Product #: 27850.0016¹



SH SERVER, 1.5G/5.7L
BLK 120 MIN ADJ TM

Product #: 27850.0022¹



SH-S SERVER 1G 60
MIN ADJ TMR

Product #: 27850.0046¹



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025