

ICB TF 1.5 PE, 120/240V SST

Height: 34.0" Width: 12.1" Depth: 23.8"
(86.4cm) (30.7cm) (60.5cm)



- Intuitive 4.3" touchscreen with user interface provides an enhanced experience when operating and programming the brewers
- The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.
- Platinum Edition SmartWave technology delivers a timed air purge at the end of the brew cycle, removing residual water from the sprayhead, reducing lime build up and ultimately extending the life of the equipment
- USB port for easy programming
- Digital readout displays in English, Spanish, or French ---for easier programming and control
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- ICB TF 54300.0101 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots
- PROP 65 Warning Decal included in packaging with equipment
- Servers not included unless otherwise noted

Server(s) sold separately

Agency:



Specifications

Product #: 54300.6101

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Funnel: Smart Funnel

Faucet: Side

Legs: 4" Satin Nickel Legs

Additional Features

Funnel Locks

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	14.6	3500	-	-	163	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	1.00

WARNING:


CAD Drawings

2D	Revit	KLC
●	●	●



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025

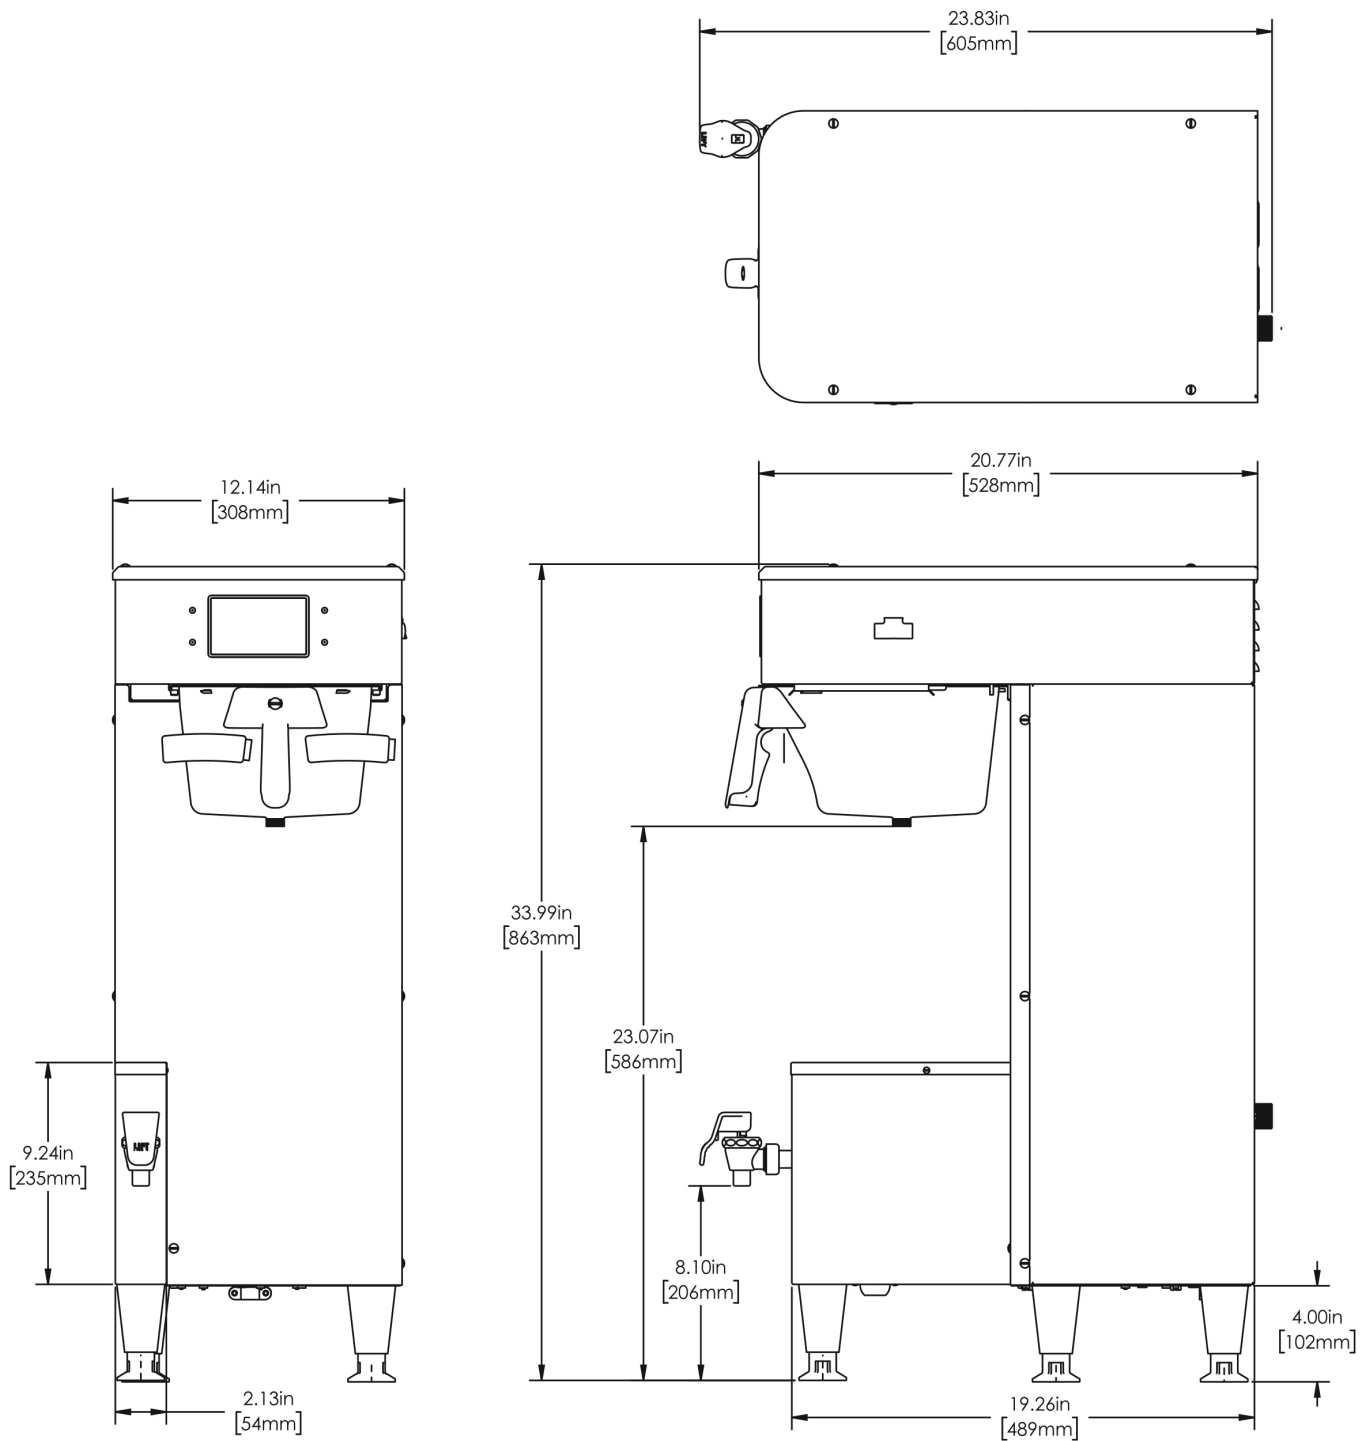

	Unit			Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	34.0 in.	12.1 in.	23.8 in.	36.5 in.	16.9 in.	29.5 in.	66.000 lbs	10.518 ft³
Metric	86.4 cm	30.7 cm	60.5 cm	92.7 cm	42.9 cm	74.9 cm	29.938 kgs	0.298 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025

Related Products & Accessories: ICB TF 1.5 PE, 120/240V SST(54300.6101)

 <p>FILTERS, GOURMET 500 500/1 50/CL</p> <hr/> <p>Product #: 20138.1000</p>	 <p>NON-LOCKING STAND ASSY, TF SERVER GEN3</p> <hr/> <p>Product #: 39795.0200</p>	 <p>STAND ASSY KIT, TF SERVER</p> <hr/> <p>Product #: 54473.1000</p>	<p>FUNNEL ASSY, SST INFUSION COFFEE ENG/ FR</p> <hr/> <p>Product #: 54675.7001²</p>	<p>KIT, BUNNLINK WIFI TEA AND INFUSION</p> <hr/> <p>Product #: 57132.0003</p>
--	--	---	--	---

<p>KIT, LTE BUNNLINK BOARD TEA AND INFUSION</p> <hr/> <p>Product #: 57133.0003</p>
--

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Mavea LLC ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025

Serving & Holding Options: ICB TF 1.5 PE, 120/240V SST(54300.6101)



TF SERVER, 1G DSG
GEN3

Product #: 42700.6200¹



TF SERVER, 1G DSG
GEN3 NOBASE

Product #: 42700.6250¹



TF SERVER, 1.5G DSG
GEN3

Product #: 42750.6200¹



TF SERVER, 1.5G DSG
GEN3 NONBASE

Product #: 42750.6250¹



TF SERVER, 1G MECH
GEN3

Product #: 44000.6200¹



TF SERVER, 1G MECH
GEN3 NOBASE

Product #: 44000.6250¹



TF SERVER, 1.5G MECH
GEN3

Product #: 44050.6200¹



TF SERVER, 1.5G MECH
NOBASE GEN3

Product #: 44050.6250¹

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Mavea LLC ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
07/08/2025