ICB TWIN TF 1.5 PE, 200V SST

Height: 34.0" (86.4cm) Width: 22.6" (57.4cm) Depth: 23.3" (59.2cm)

Server(s) sold separately

- Intuitive 4.3" touchscreen with user interface provides an enhanced experience when operating and programming the brewers
- The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.
- Platinum Edition SmartWave technology delivers a timed air purge at the end of the brew cycle, removing residual water from the sprayhead, reducing lime build up and ultimately extending the life of the equipment
- Multiple recipes from one footprint --- with six brew buttons and three batch sizes
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- USB port for easy programming
- Digital readout displays in English, Spanish, or French ---for easier programming and control
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- ICB TF 54200.0101 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots

Agency:

Specifications

Product #: 54200.0500

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Funnel: Smart Funnel

Faucet: Lower

Legs: 4" Satin Nickel Legs

Additional Features

Hot Water Button

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
200	27.8	5550	-	-	259	60°F (15.5°C)	1	2	50/60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	1.00

WARNING:

CAD Drawings

2D	Revit	KLC
●	●	

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

For most current specifications and other info visit bunn.com.

Last Updated: 08/31/2026

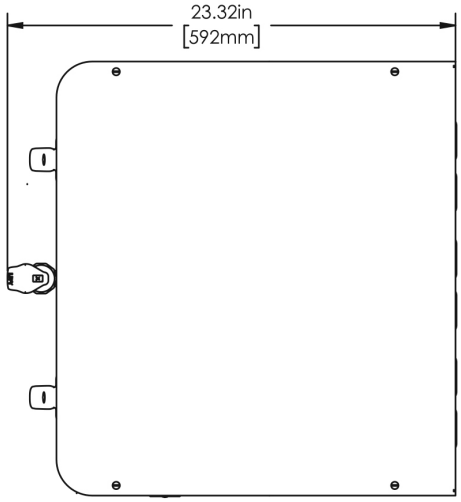

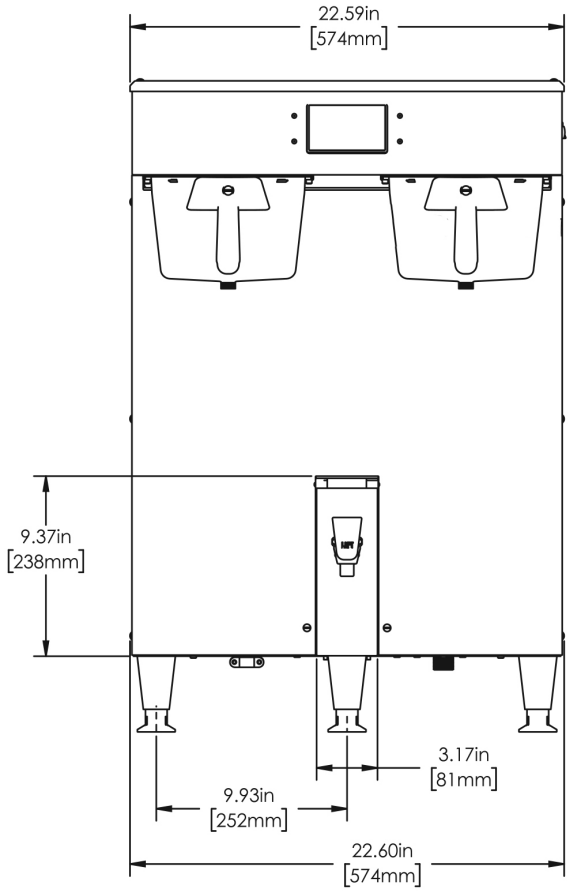

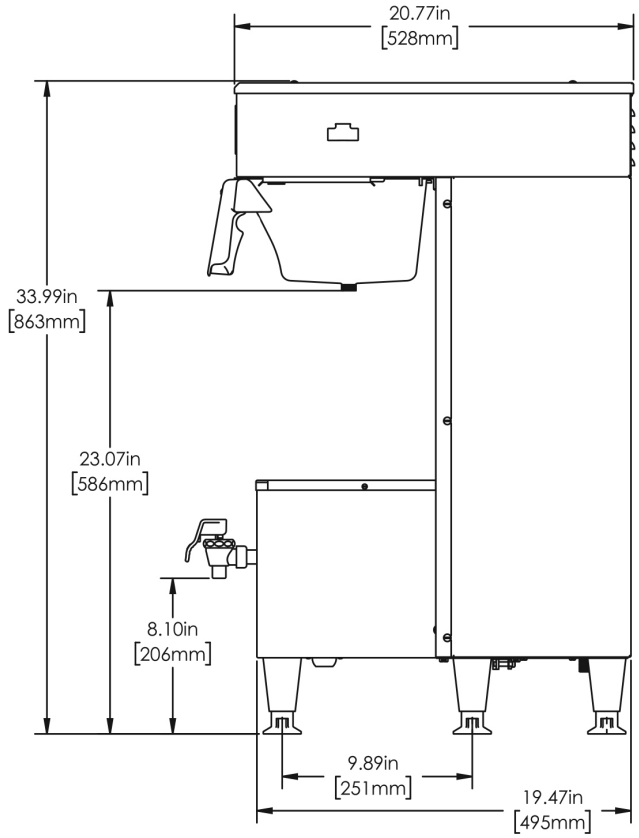

	Unit			Shipping				
	Height	**Width**	**Depth**	**Height**	**Width**	**Depth**	**Weight**	**Volume**
English	34.0 in.	22.6 in.	23.3 in.	30.8 in.	25.8 in.	26.7 in.	87.600 lbs	12.259 ft³
Metric	86.4 cm	57.4 cm	59.2 cm	78.1 cm	65.6 cm	67.8 cm	39.735 kgs	0.347 m³

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 08/31/2026

Related Products & Accessories: ICB TWIN TF 1.5 PE, 200V SST(54200.0500)

FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000

WATER FILTER, EQHP-10L

Product #: 39000.0001[3]

WATER FILTER, EQHP-10

Product #: 39000.0004[3]

NON-LOCKING STAND ASSY, TF SERVER GEN3

Product #: 39795.0200

STAND ASSY KIT, TF SERVER

Product #: 54473.1000

SYSTEM, WQ-55(2)5L

Product #: 56000.0001[1]

SYSTEM, WQ-55(2)5

Product #: 56000.0004[1]

SYSTEM, WEQ-10(1.5)5L

Product #: 56000.0024[1]

SYSTEM, WEQ-10(1.5)5

Product #: 56000.0027[1]

CARTRIDGE, WQ-55(2)5L

Product #: 56000.0101[1]

CARTRIDGE, WQ-55(2)5

Product #: 56000.0104[1]

CARTRIDGE, WEQ-10 (1.5)5L

Product #: 56000.0121[1]

CARTRIDGE, WEQ-10 (1.5)5

Product #: 56000.0122[1]

KIT, BUNNLINK WIFI TEA AND INFUSION

Product #: 57132.0003

KIT, LTE BUNNLINK BOARD TEA AND INFUSION

Product #: 57133.0003

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 08/31/2026

Serving & Holding Options: ICB TWIN TF 1.5 PE, 200V SST(54200.0500)

TF SERVER, 1G DSG GEN3

Product #: 42700.0200[1]

TF SERVER, 1G DSG GEN3 NOBASE

Product #: 42700.0250[1]

TF SERVER, 1G MECH GEN3

Product #: 44000.0200[1]

TF SERVER, 1G MECH GEN3 NOBASE

Product #: 44000.0250[1]

TF SERVER, 1.5G MECH GEN3

Product #: 44050.0200[1]

TF SERVER, 1.5G MECH NOBASE GEN3

Product #: 44050.0250[1]

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 08/31/2026

an Ali Group Company

the spirit of excellence