


ITB-Low Profile, 120V

Height: 29.4" (74.7cm) Width: 11.7" (29.7cm) Depth: 23.7" (60.2cm)



- Sleek, modernized design language on the brewer, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --- with three brew buttons and two batch sizes
- Easy pulse display allows for simplified programming of pulse routine
- Compact, low-profile styling to accommodate a variety of spaces
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 7-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Includes overlay kit for customization of brewer interface

Agency:

 Server(s) sold separately



Specifications

Product #: 52000.0101

Legs: 4" Black Legs

Water Access: Plumbed

Finish: Stainless

Funnel: Translucent Tea Funnel

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	336	60°F (15.5°C)	1	2	60


*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	1.25

CAD Drawings





2D	Revit	KLC

 **WARNING:** This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
08/18/2025

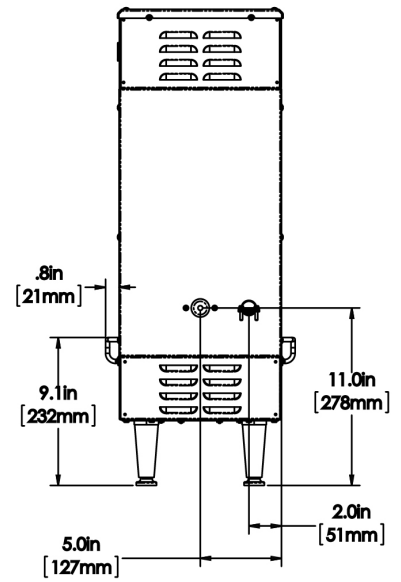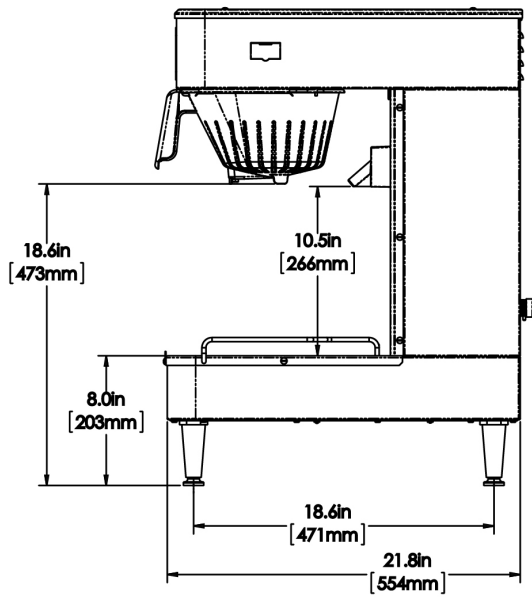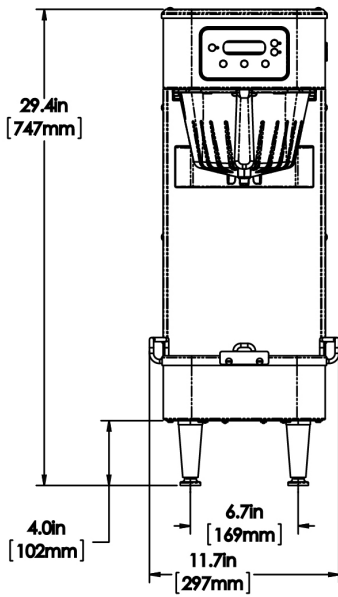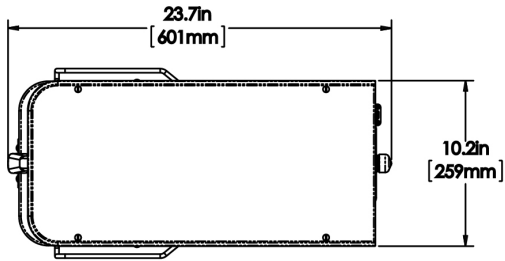










	Unit			Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	29.4 in.	11.7 in.	23.7 in.	33.8 in.	13.8 in.	26.4 in.	36.150 lbs	7.083 ft ³
Metric	74.7 cm	29.7 cm	60.2 cm	85.7 cm	34.9 cm	67.0 cm	16.398 kgs	0.201 m ³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
08/18/2025

Related Products & Accessories:ITB-Low Profile, 120V(52000.0101)

 <p>FILTERS, GOURMET 500 500/1 50/CL</p> <hr/> <p>Product #: 20138.1000</p>	 <p>WATER FILTER, EQHP- TEA</p> <hr/> <p>Product #: 39000.0007</p>	 <p>FUNNEL ASSY, SMART COFFEE BLK-CLEARED</p> <hr/> <p>Product #: 53463.0021</p>	 <p>FUNNEL ASSY, TEA NATURAL QUICK BREW</p> <hr/> <p>Product #: 53463.0023</p>	 <p>FUNNEL ASSY, TEA NATURAL QUICK BREW</p> <hr/> <p>Product #: 53463.0036</p>
<p>FUNNEL ASSY,TEA NATURAL</p> <hr/> <p>Product #: 53463.0040²</p>	 <p>SYSTEM, WQ-SFTN4000 (1.5)10 TEA</p> <hr/> <p>Product #: 56000.0021¹</p>	 <p>SYSTEM, WEQ- SFTN3500(1)10 TEA</p> <hr/> <p>Product #: 56000.0030</p>	 <p>CARTRIDGE, WEQ- SFTN3500(1)10 TEA</p> <hr/> <p>Product #: 56000.0129¹</p>	 <p>CARTRIDGE, WQ- SFTN4000(1.5)10 TEA</p> <hr/> <p>Product #: 56000.0133¹</p>

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Mavea LLC ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
08/18/2025

Serving & Holding Options: ITB-Low Profile, 120V(52000.0101)



TDO-3.5,LP RSVR BREW
THRU

Product #: 37100.0000¹

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Mavea LLC ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
08/18/2025